
Newton Carriageway / Commonwealth Avenue (Route 30) Reconstruction Project

Nicole Freedman

Director of Transportation Planning City of Newton

April 20, 2022

Existing Issues: Ash Street

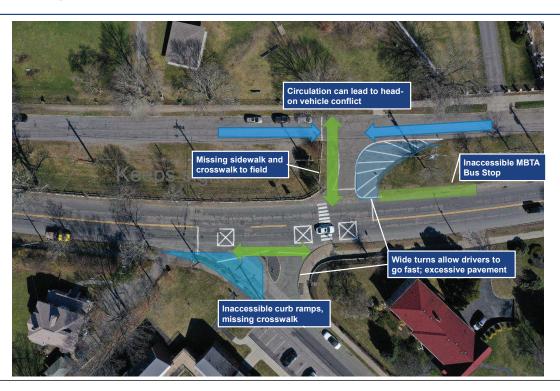

Existing Issues: Ash Street

 Complete Streets Accommodations: Lack of bicycle facilities and lack of accessible pedestrian accommodations



Ash Street Signal

We cannot reconstruct any part of Ash
Street and keep the signal

Islington Road to Ash Street – Preferred Design (with Ash)
No change since 4/6/22 public hearing. Removes signal. Upgrades Ash.







Islington Road to Ash Street – "Option 3" (with Ash) New since 4/6. Removes signal. Upgrades Ash. "Signal-ready"





Preferred Design (With Ash), from 4/6
Upgrades Ash
Removes signal
Closes intersection



Alt Design (Without Ash), from 4/6 No Ash upgrades Keeps signal



"Option 3" (With Ash), NEW since 4/6
Upgrades Ash
Removes signal
Keep intersection – "signal-ready"

Islington Road Average Delay at AM Peak Hour

Intersection/ Movement	No Build Conditions (Signal)	Preferred Design (Upgrade Ash. No Signal)	Alternative (Keep signal. No Ash Upgrades)	"Option 3" – (Upgrade Ash. No Signal but Signal- ready	
	Average Delay (Seconds)				
Commonwealth Avenue/ Islington Road					
Islington SB left	66	153	50	75	
Islington SB right		18			
Commonwealth Avenue/ Ash Street					
Ash NB left/right	36	72	36	126	
Carriageway SB left/right	34	-	34	113	

Islington Road Average Delay at PM Peak Hour

Intersection/ Movement	No Build Conditions (Signal)	Preferred Design (Upgrade Ash. No Signal)	Alternative (Keep signal. No Ash Upgrades)	"Option 3" – (Upgrade Ash. No Signal but Signal- ready	
	Average Delay (Seconds)				
Commonwealth Avenue/ Islington Road					
Islington SB left	42	64	35	46	
Islington SB right		18			
Commonwealth Avenue/ Ash Street					
Ash NB left/right	48	45	48	66	
Carriageway SB left/right	45	-	45	48	

Question: Why can't we upgrade Ash St <u>and</u> add a signal? Can the City install the signal later?

The project is funded by MassDOT. MassDOT law does not allow installation of a signal that does not meet traffic warrants.

If we reconstruct Ash, per MassDOT rules, we will need MassDOT approval for future installation of a signal.

If the City reconstructs Ash separate from this project, the City would not recommend the installation of a traffic signal at at Ash Street because it does not meet signal warrants.

Question: Can the City allow eastbound travel on the Carriageway from Islington to Melrose?

We reviewed this option. The Melrose signal currently operates with significant delay. The addition of vehicles from Islington and Ash with rerouting will increase delay from ~60 seconds to ~120 seconds at Melrose southbound.

Question: Can the City install a roundabout at Islington?
We are continuing to review this option and will present more at our meeting.
Question: Can we add more traffic calming to Commonwealth Avenue
We are looking into what additional traffic calming will be possible.

Question: Did the pandemic i	influence t	the traffic	: data?
------------------------------	-------------	-------------	---------

Traffic data was taken twice. The first collection occurred before Covid (February 25-27), nearly 2 weeks before the State of Emergency was declared, and before school was closed in Newton.

A second set of data was taken in June 2021. We worked closely with Parks & Rec to ensure that traffic count data was collected during a time that Lyons Field was being heavily used.

Question: Can we add more parking spaces for the dog park

We are looking at adding up to 5 parking spaces near Woodbine on Comm Ave for combined use of the existing park and any future dog park, plus the businesses/ residences on Woodbine. To make a final determination, we are doing a parking study.

