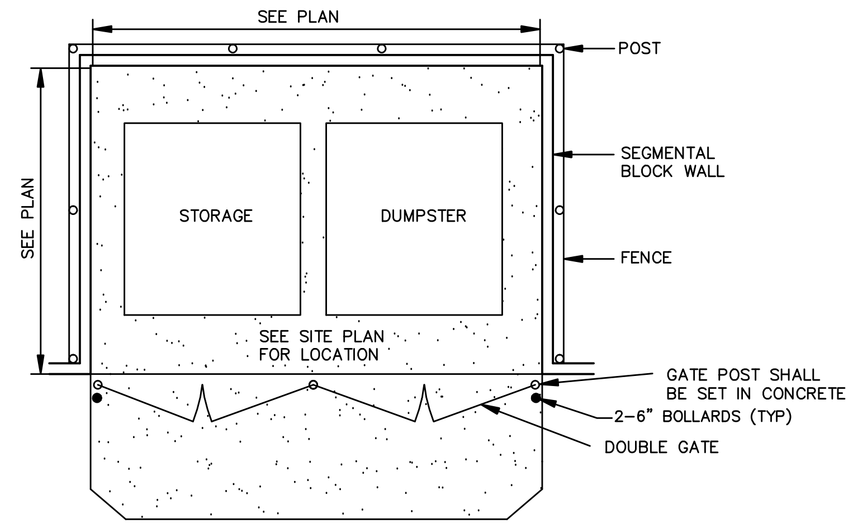

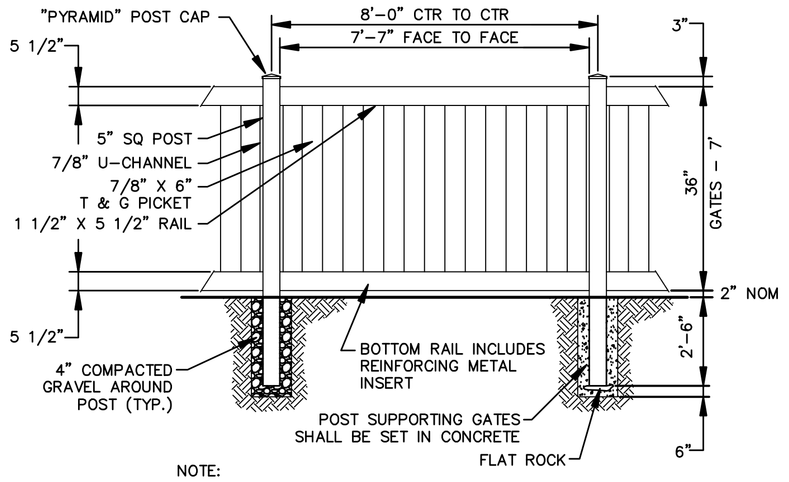

NOTE:
1. FOOTING WIDTH TO BE (2)X POST WIDTH. MINIMUM DEPTH 30".
2. GATE SECTIONS SHALL BE 7' TALL.

1 — PVC(VINYL) FENCE DUMPSTER ENCLOSURE N.T.S.

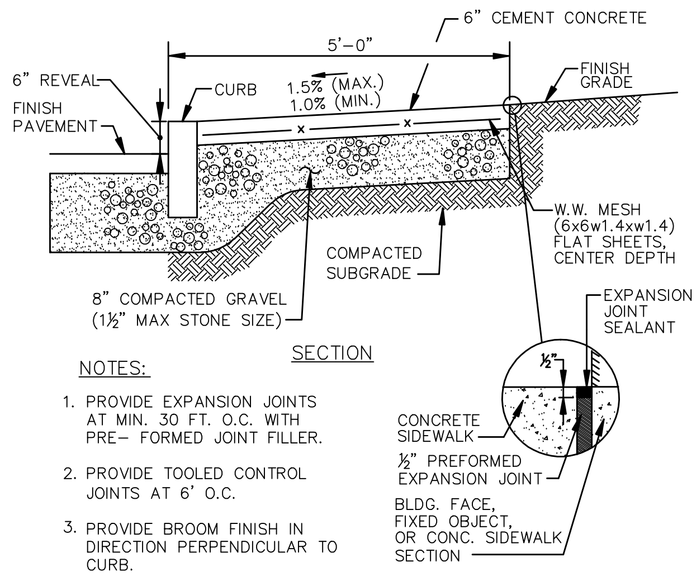

NOTES:
1. PROVIDE EXPANSION JOINTS AT MIN. 30 FT. O.C. WITH PRE– FORMED JOINT FILLER.
2. PROVIDE TOOLED CONTROL JOINTS AT 6' O.C.
3. PROVIDE BROOM FINISH IN DIRECTION PERPENDICULAR TO CURB.
4. CEMENT CONCRETE SHALL BE 4000 PSI–TYPE ||

2 — CONCRETE SIDEWALK N.T.S.

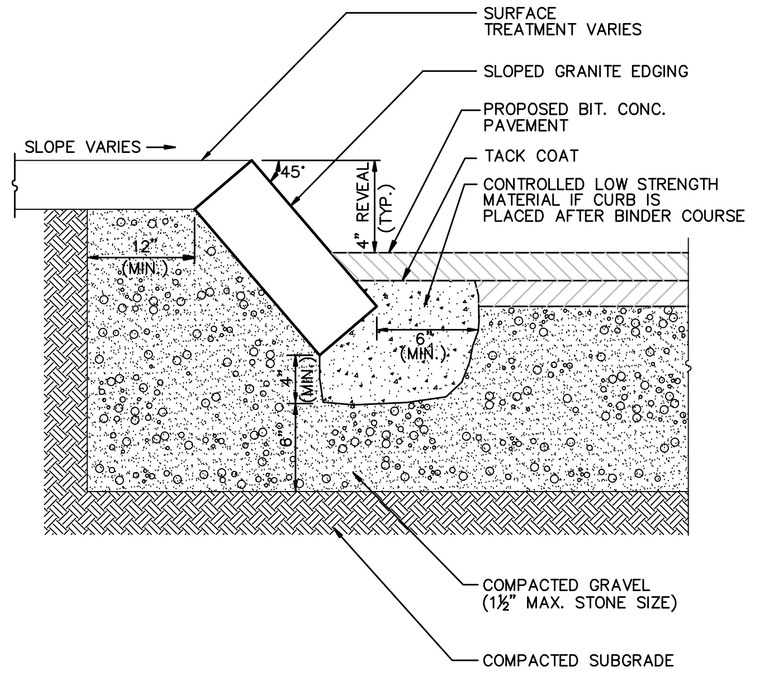

3 — SLOPED GRANITE CURB (SGC) N.T.S.

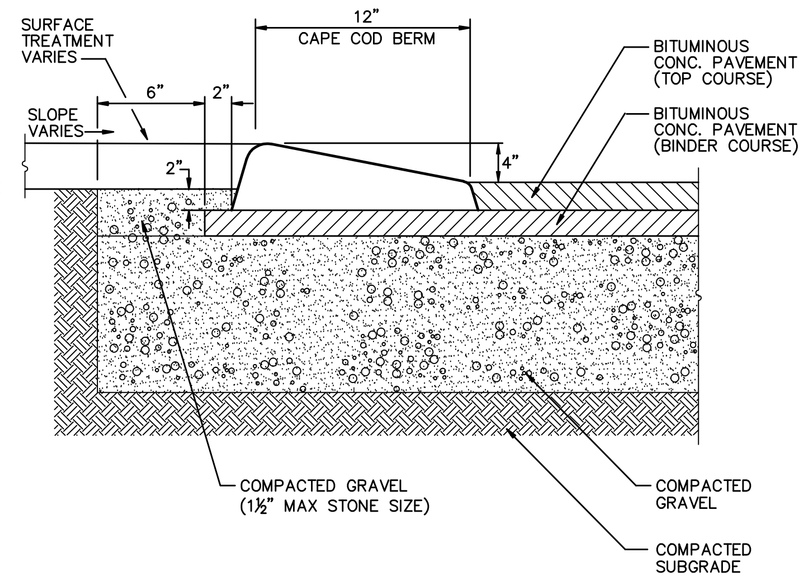

Note:
ALL CURBING TO BE MACHINE EXTRUDED

4 — CAPE CAD BERM (CCB) N.T.S.

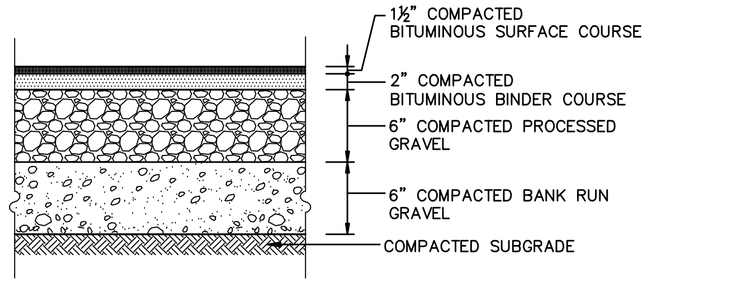

5 — BITUMINOUS CONCRETE PAVEMENT SECTION NOT TO SCALE

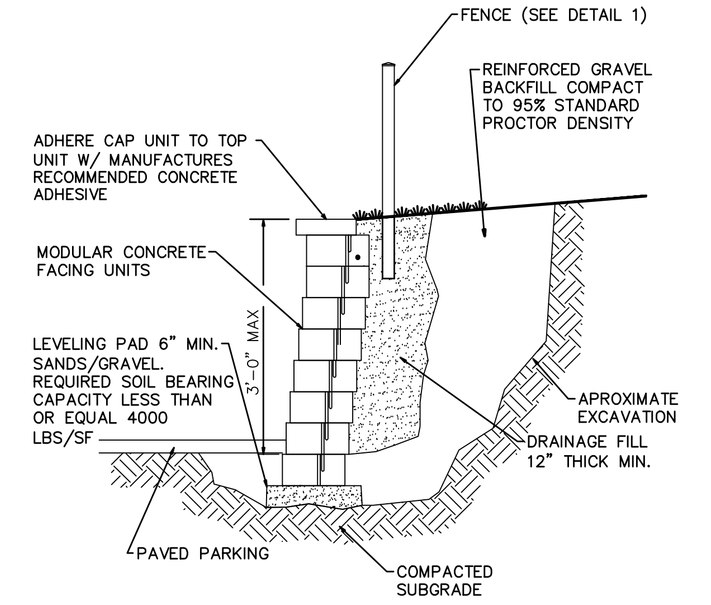

NOTE:
DETAIL PROVIDED FOR GENERAL INFORMATION ONLY. STAMPED FINAL DESIGN OF MODULAR WALL SYSTEM TO BE PROVIDED BY WALL MANUFACTURER BASED ON GEOTECHNICAL ENGINEERS RECOMMENDATIONS.

7 — SEGMENTAL BLOCK RETAINING WALL NOT TO SCALE

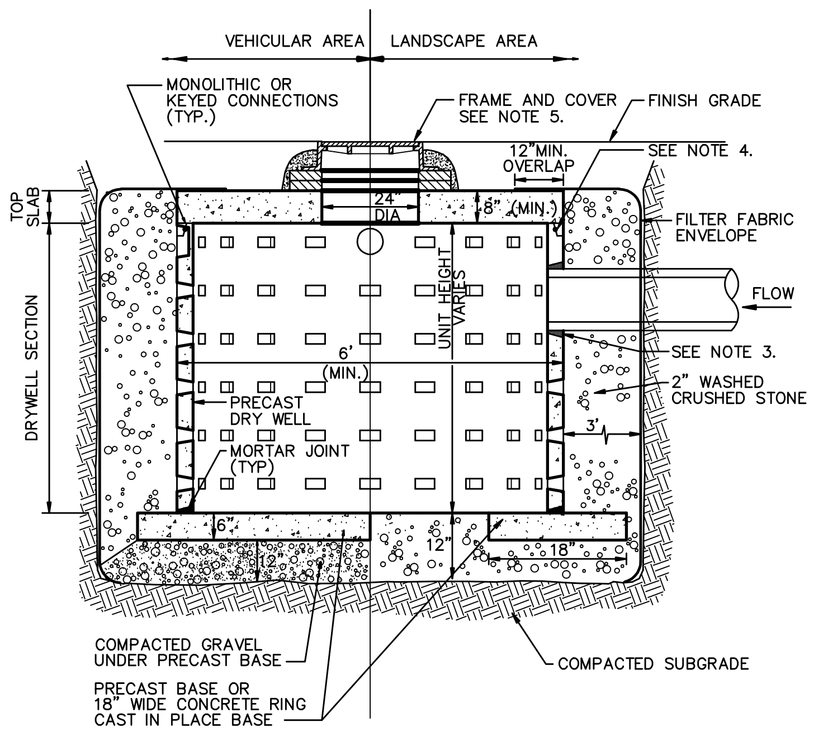

Notes:
1. BASE SECTION SHALL BE PRECAST CONCRETE WITH MORTARED JOINTS OR CAST IN PLACE.
2. ALL COMPONENTS SHALL BE DESIGNED FOR HS–20 LOADING.
3. PROVIDE PRECAST "V" KNOCKOUTS FOR PIPES WITH 2" MAX. CLEARANCE TO OUTSIDE OF PIPE. MORTAR ALL PIPE CONNECTIONS.
4. JOINT SEALANT BETWEEN PRECAST SECTIONS SHALL BE PREFORMED BUTYL RUBBER.
5. FRAME AND COVER SHALL BE SET IN FULL MORTAR BED. ADJUST TO GRADE WITH CLAY BRICK AND MORTAR (2 BRICK COURSE MINIMUM, 5 BRICK COURSE MAXIMUM)

8 — LEACHING CHAMBER NOT TO SCALE

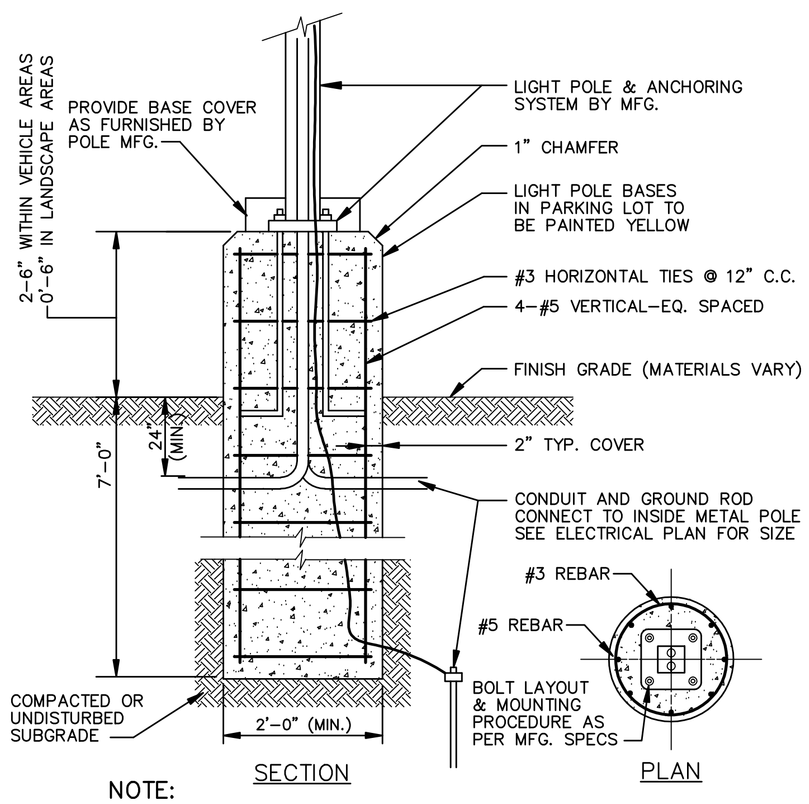

NOTE:
LIGHT POLE FOUNDATION DESIGN IS SUBJECT TO CHANGE BASED ON FINAL POLE AND FIXTURE SELECTION AND GEOTECHNICAL SITE INVESTIGATION.

9 — LIGHT POLE FOUNDATION(UP TO 40' POLE) NOT TO SCALE

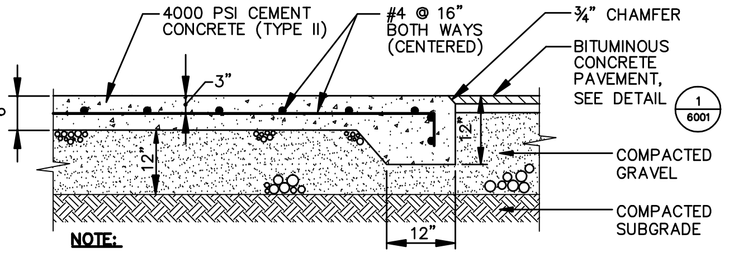

NOTE:
1. SIZE OF COMPACTOR PAD TO BE AS INDICATED ON PLANS. CONSTRUCTION JOINTS TO BE SET AT INTERVALS OF 1/3 OF LENGTH.

6 — DUMPSTER PAD N.T.S.

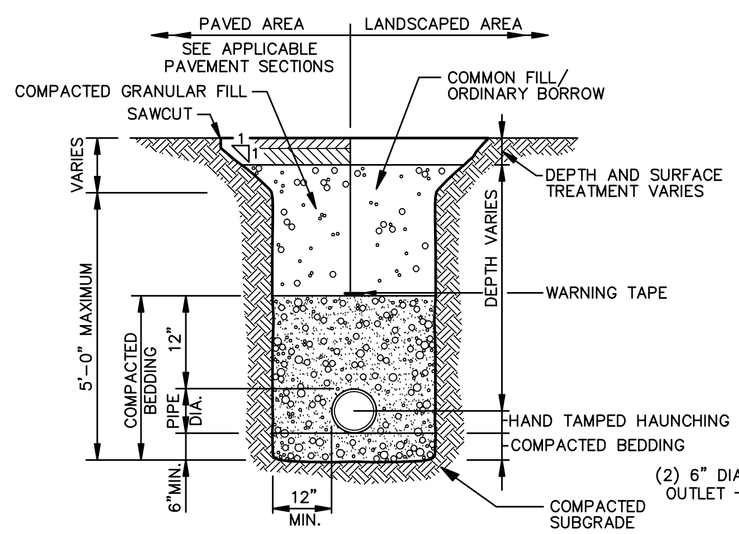

NOTES:
1. WHERE UTILITY TRENCHES ARE CONSTRUCTED THROUGH DETENTION BASIN BERMS OR OTHER SUCH SPECIAL SECTIONS, PLACE TRENCH BACKFILL WITH MATERIALS SIMILAR TO THE SPECIAL SECTION REQUIREMENTS.
2. USE METALLIC TRACING/WARNING TAPE OVER ALL PIPES.
3. FOR HDPE AND SDR–35 PIPING BEDDING MATERIAL SHALL BE ¾" CRUSHED STONE AND BE COMPACTED (95% MODIFIED PROCTOR).

10 — UTILITY TRENCH NOT TO SCALE

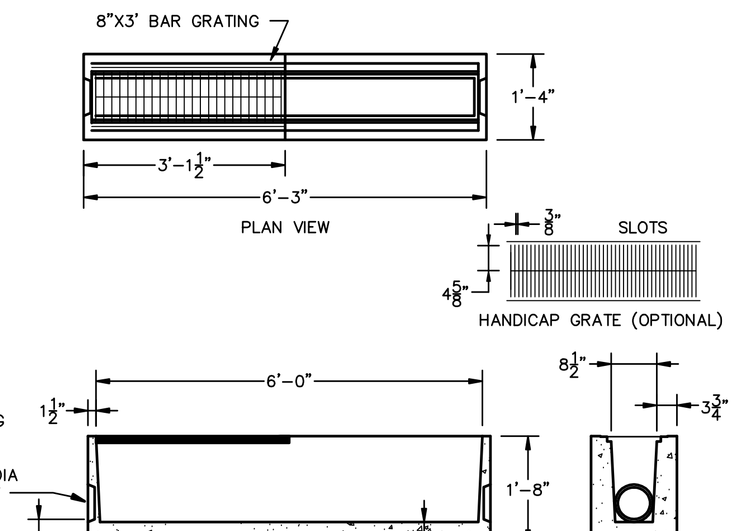

NOTES:
1. CONCRETE: 4,000 PSI MINIMUM AFTER 28 DAYS.
2. ALL SECTIONS SHALL BE DESIGNED FOR H–20 LOADING.

11 — TRENCH DRAIN NOT TO SCALE

Pennoni
PENNONI ASSOCIATES INC.
CONSULTING ENGINEERS

Pennoni Associates Inc.
100 Burtt Road, Suite 120, Andover, MA 01810 Tel. (978) 749–9920 Fax. (978) 749–9929
93 Stiles Road, Suite 201, Salem, NH 03079 Tel. (603) 226–1950, Fax. (603) 226–3235
Engineers • Surveyors • Environmental Scientists • Petroleum Specialists

DATE	NO.	REVISIONS	BY

ALL DIMENSIONS MUST BE VERIFIED BY CONTRACTOR & MUST BE REPORTED TO ARCHITECT NOTIFIED OF ANY DISCREPANCIES BEFORE PROCEEDING WITH THE WORK.

ASSESSOR'S MAP 64 BLOCK 3 LOTS 10, 11 & 12
1101 BEACON STREET
NEWTON, MA

SITE DETAILS

PREPARED FOR:
WALGREEN'S REAL ESTATE
106 MILMOT ROAD
DEERFIELD, IL 60015–5105

ALL DOCUMENTS PREPARED BY PENNONI ASSOCIATES ARE INSTRUMENTS OF SERVICE IN RESPECT OF THE PROJECT. THEY ARE NOT INTENDED OR REPRESENTED TO BE SUITABLE FOR REUSE BY OWNER OR OTHERS ON EXTENSIONS OF THE PROJECT OR ON ANY OTHER PROJECT. ANY REUSE WITHOUT WRITTEN VERIFICATION OR ADAPTATION BY PENNONI ASSOCIATES FOR THE SPECIFIC PURPOSE INTENDED WILL BE AT OWNERS SOLE RISK AND WITHOUT LIABILITY OR LEGAL EX–POSURE TO PENNONI ASSOCIATES. AND OWNER SHALL INDEMNIFY AND HOLD HARMLESS PENNONI ASSO–CIATES FROM ALL CLAIMS, DAMAGES, LOSSES AND EXPENSES ARISING OUT OF OR RESULTING THEREFROM

JOB NO. WALG 1106
SHEET 11 OF 16

SCALE	DRAWING NO.
NTS	CS-6001
DRAWN BY: CPH	
DATE: 4/26/2012	
APPROVED: BCO	

K:\PROJECTS\WALG\01106–1101 Beacon Street Newton MA\DESIGN\CS\CS–6001.dwg Mon, 30 Apr 2012 – 7:31am