

• • • • • BOSTON Light source


Plan View
Scale - 1" = 35'

Statistics

Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min	Avg/Max
Parking Area	+	1.5 fc	3.7 fc	0.0 fc	N/A	N/A	0.4:1
Sidewalk East	+	1.5 fc	2.3 fc	0.4 fc	5.8:1	3.8:1	0.7:1
Sidewalk West	+	1.5 fc	3.5 fc	0.2 fc	17.5:1	7.5:1	0.4:1
Spill Area	+	0.2 fc	2.0 fc	0.0 fc	N/A	N/A	0.1:1

Luminaire Schedule

Symbol	Label	Quantity	Manufacturer	Catalog Number	Description	Lamp	Number Lamps	Filename	Lumens Per Lamp	Light Loss Factor	Wattage
	A	42	SELUX CORPORATION	SAACL-1-LG3500-R5-35-120	Saturn Cutoff LED	(5 Clusters of 30 LED's) White 50W SSL c/w Advance Driver XITANIUM 100W 0.35A/0.53A/0.70A @ 120.00V	1	SAACL-1-LG3500-R5-35.ies	3598.884	0.9	51
	C	9	Lithonia Lighting	DSXO LED 40C 1000 40K T3M MVOLT HS	DSXO LED WITH (2) 20 LED LIGHT ENGINE, TYPE T3M OPTIC, 4000K, @ 1000mA WITH HOUSE SIDE SHIELD	LED	1	DSXO_LED_40C_1000_40K_T3M_MVOLT_HS.ies	9044.458	0.9	138
	D	9	Lithonia Lighting	DSXO LED 40C 1000 40K T5W MVOLT	DSXO LED WITH (2) 20 LED LIGHT ENGINE, TYPE T5W OPTIC, 4000K, @ 1000mA	LED	1	DSXO_LED_40C_1000_40K_T5W_MVOLT.ies	12596.51	0.9	276
	E	5	Lithonia Lighting	DSXW1 LED 20C 700 40K TFTM MVOLT	DSXW1 LED WITH 2 LIGHT ENGINES, 20 LED's, 700mA DRIVER, 4000K LED, TYPE FORWARD THROW MEDIUM OPTIC	LED	1	DSXW1_LED_20C_700_40K_TFTM_MVOLT.ies	4463.445	0.9	47
	F	16	Lithonia Lighting	DSXW1 LED 20C 700 40K T3M MVOLT	DSXW1 LED WITH 2 LIGHT ENGINES, 20 LED's, 700mA DRIVER, 4000K LED, TYPE 3 MEDIUM OPTIC	LED	1	DSXW1_LED_20C_700_40K_T3M_MVOLT.ies	4430.584	0.9	47
	B	22	LUMEC	DOSB1-30W16LED4K	Domus Bollard	(DOSB1) White 35W SSL c/w Advance Driver XITANIUM 40W24V @ 120.00V	1	DOSB1-30W16LED4K (S1106142).ies	756.1763	0.9	28.03
	G	1	Lithonia Lighting	DSXO LED 40C 1000 40K T5W MVOLT	DSXO LED WITH (2) 20 LED LIGHT ENGINE, TYPE T5W OPTIC, 4000K, @ 1000mA	LED	1	DSXO_LED_40C_1000_40K_T5W_MVOLT.ies	12596.51	0.9	138

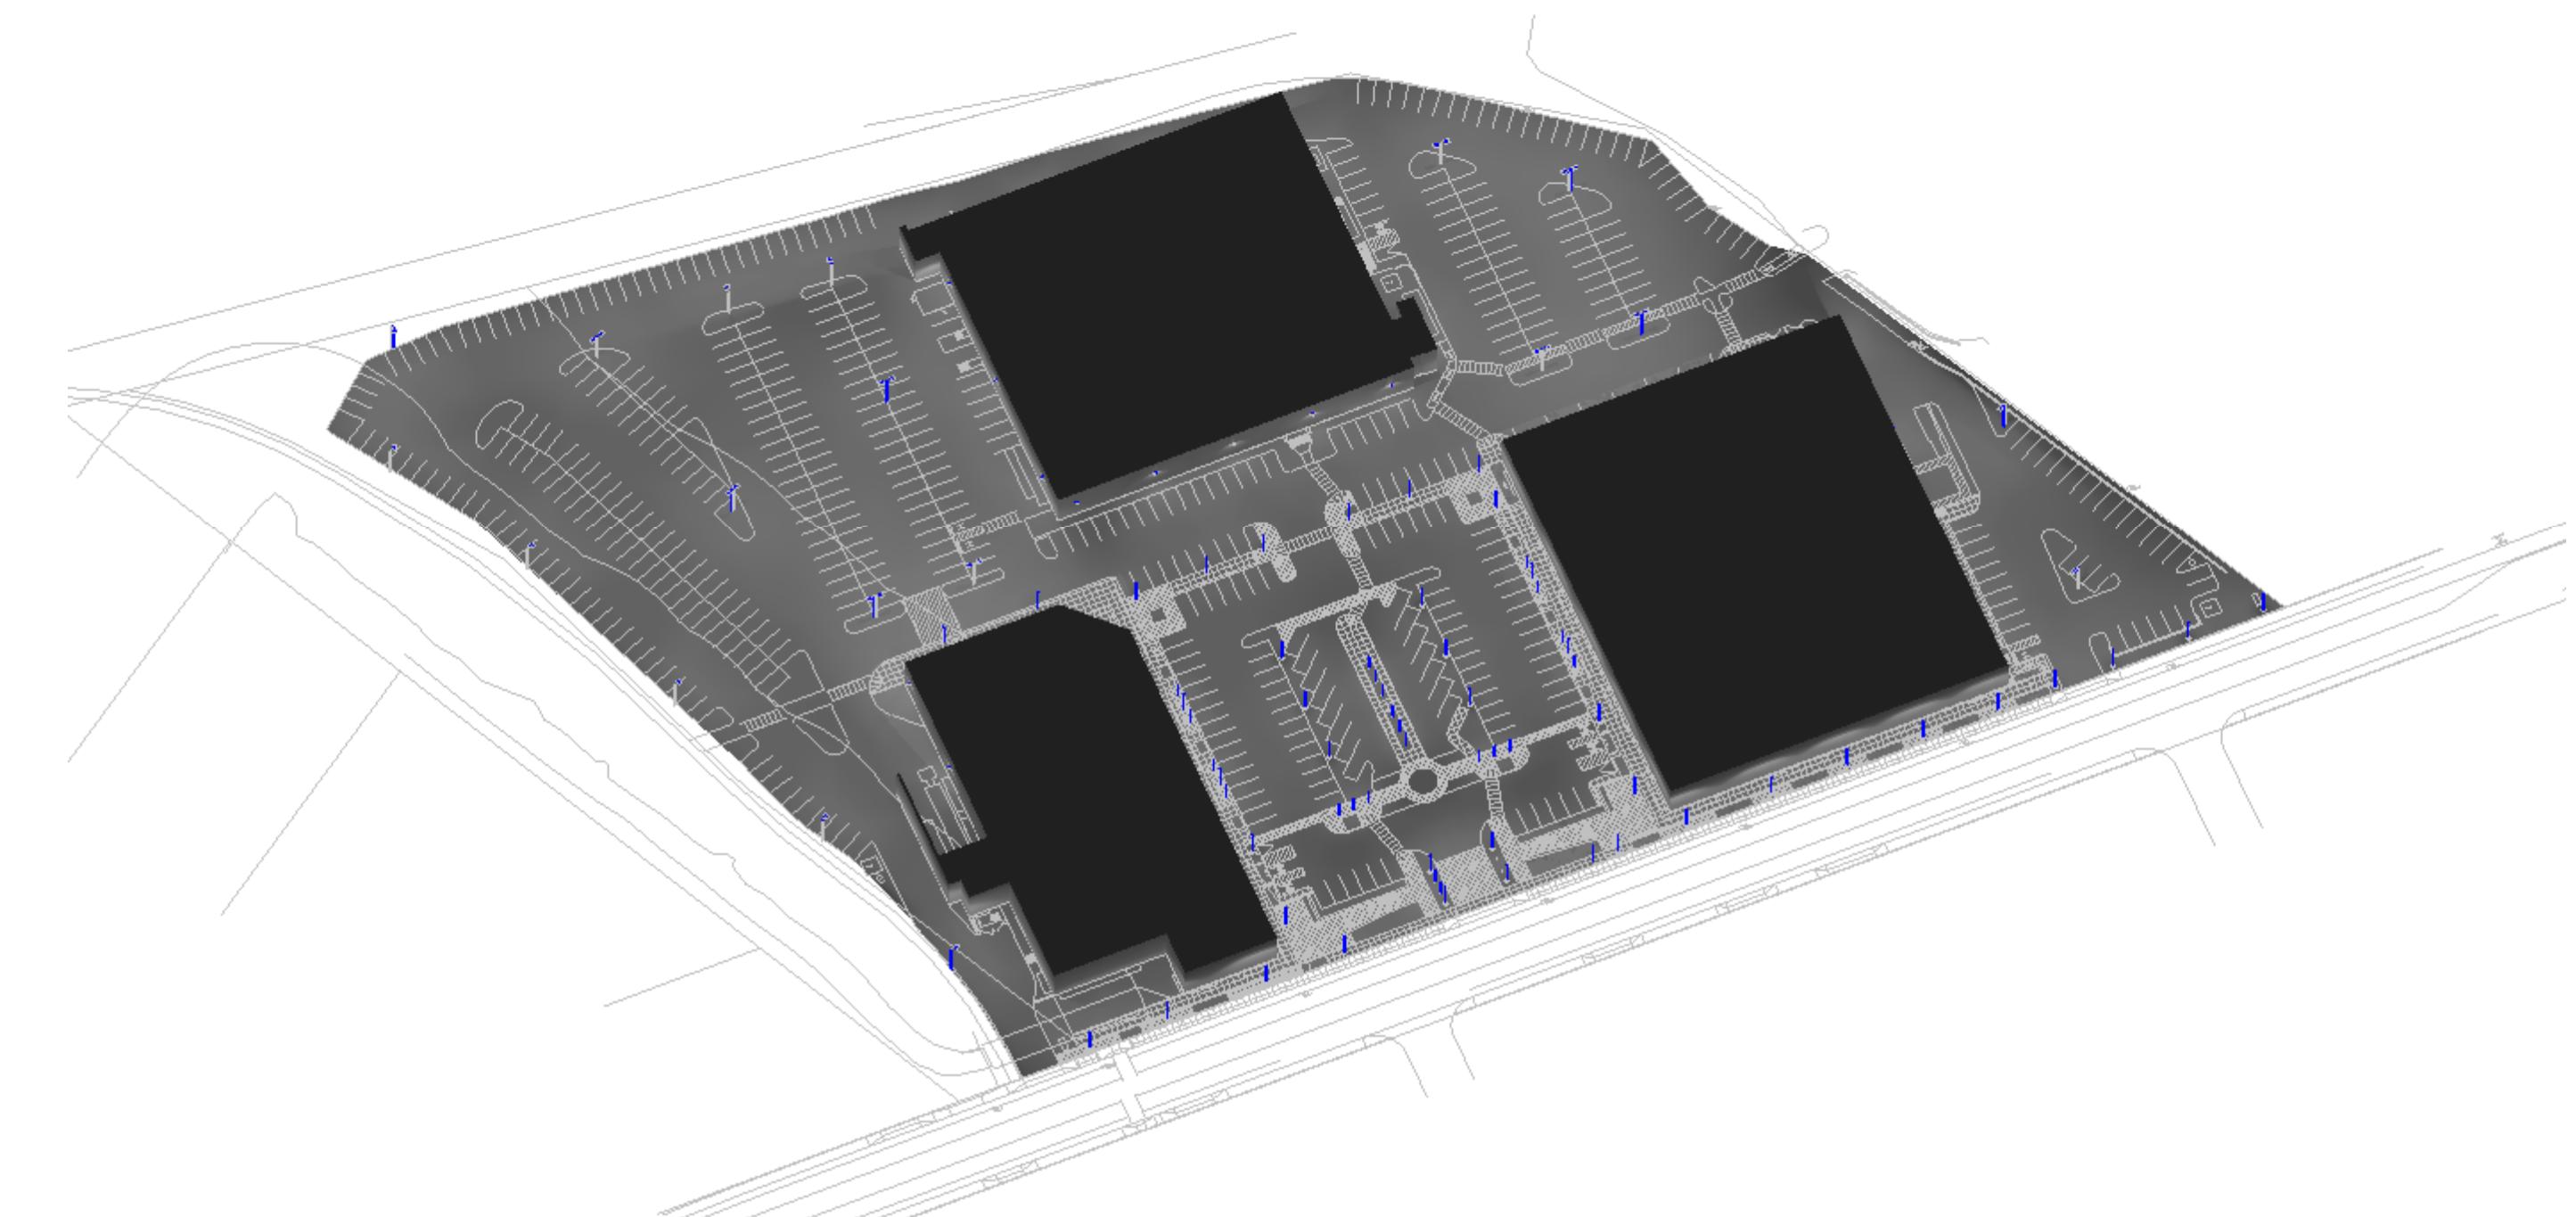

These drawings are for conceptual use only and are not intended for construction. Values represented are an approximation generated from manufacturers photometric inhouse or independent lab tests with data supplied by lamp manufacturers.