Kaitlin Spiegel

176 Dedham Street

Floodplain Compensatory Storage Plan/ Mitigation for Privacy Fence (Shadowbox style)

Requirements:

3.25 cubic yards (88 cubic feet) of new, connected, flood storage on my property.

Plan:

Cement Blocks
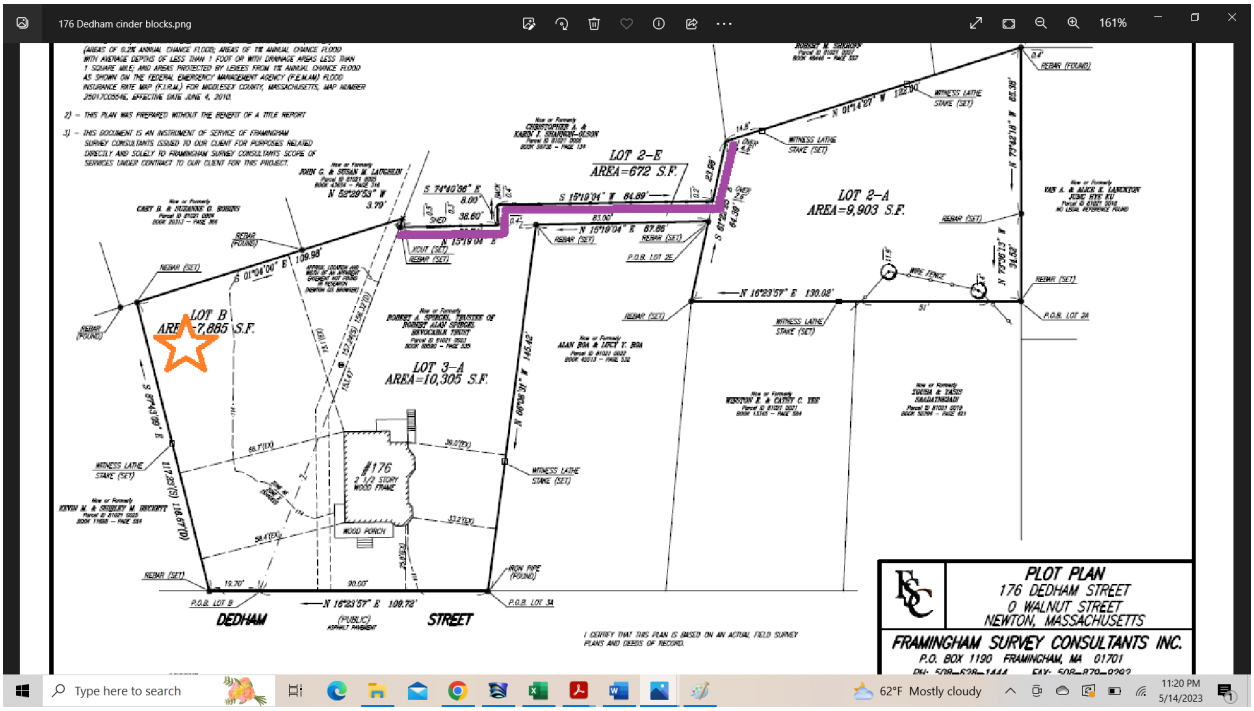
There are approximately 150 cement blocks on my property. The cement blocks are double stacked and outline the stockade-style fence on 249 Woodcliff (purple line). Lots 3A, 2E, and 2A individually have ~50 cement blocks each – refer to pictures for examples. I plan to remove all cement blocks from lot 3A. If additional volume for mitigation is needed, I can remove additional cement blocks on lots 2E and 2A. The cement blocks will be moved to the non-floodplain part of property on lot B (orange star).